


Code	Project	Release	Title
<b>ST18</b>	<b>A33</b>	<b>A</b>	<b>TECHNICAL DATASHEET</b>

## OPTICAL ENCODER EN531

### GENERAL FEATURES

- Optical rotary encoder.
- Bi-directional signals with zero pulse.
- Flange and body made of aluminium.
- Output by connector or cable (with sealing fairlead), radial or axial.

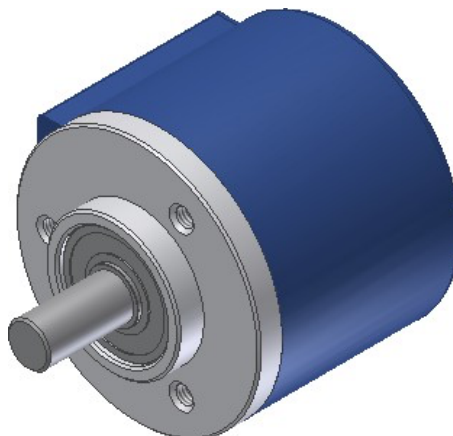

### MECHANICAL AND ELECTRICAL FEATURES

#### MECHANICAL

- Flange and body made of aluminium.
- Shaft made of stainless steel.
- Ball bearings with special high-sealed screens.
- High protection even in harsh environmental conditions.

#### ELECTRICAL

- Protection against short circuits.
- Protection against inversion of polarity.
- High stability of output signals.
- Reading device with an infra-red light emitter and receiving photodiodes.
- A and B output signals with phase displacement of 90° electrical.

Code EN531	PP	LD	OC
<b>Pulses per revolution</b>	5 to 64000 ppr		
<b>Max. rotating speed</b>	momentary	12000 rpm	
	permanent	8000 rpm	
<b>Max. load on shaft</b>	100 N (radial) – 100 N (axial)		
<b>Shaft (diameter A x length L) mm</b>	Ø6x10-Ø8x20 -Ø9.52x20 -Ø10x20 others on request		
<b>Protection class</b>	IP65 (standard) * IP67 (optional)		
<b>Operating temperature</b>	0 + 70°C		
<b>Storage temperature</b>	-20 + 80°C		
<b>Humidity</b>	20 + 90% (not condensed)		
<b>Power supply</b>	5 V ± 5% 5 + 28 V ± 5%		
<b>Max. consumption at 5 V (with no load)</b>	25 mA		
<b>Max. output current (each channel)</b>	30 mA		
<b>Max. frequency</b>	300 kHz		
<b>Output</b>	Push-Pull	Line Driver	Open Collector
<b>Standard length of cable</b>	1 m		
<b>Electrical connections</b>	see the rel. table		
<b>Electrical protection</b>	inversion of power supply polarity and short circuits on output port		
<b>Weight (according to model)</b>	280 + 340 g		

\* It is important to note that shaft rotates more freely in the version with protection class IP65.

### ORDERING CODE

MODEL	CABLE/CONN. OUTPUT	ACCURACY	PPR	POWER SUPPLY	SHAFT Ø	CABLE / CONN.	OUTPUT	CONNECTION	OPTIONS
<b>EN531</b>	<b>HR</b>	<b>S</b>	<b>xxxxx</b>	<b>05V</b>	<b>D06</b>	<b>CE</b>	<b>PP</b>	<b>2</b>	<b>V2</b>

HR = radial  
HA = axial

No code = standard  
S = special

05V = 5V  
0528 = 5+28V

D06 = Ø6 mm  
D08 = Ø8 mm  
9.52 = Ø9.52 mm  
D10 = Ø10 mm

M.5 = 0.5m  
M01 = 1m  
CE = 7P Amph.  
CF = 10P Amph.  
CG = 12P Connei

LD = LINE DRIVER  
PP = PUSH-PULL  
ON = OC NPN  
OP = OC PNP

C = cable  
n = no. wiring

No code = . standard configuration  
V2 = protection class IP67

Code <b>ST18</b>	Project <b>A33</b>	Release <b>A</b>	Title <b>TECHNICAL DATASHEET</b>
---------------------	-----------------------	---------------------	-------------------------------------

### CABLE AND ELECTRICAL CONNECTIONS

<p><b>Cable 8 cores <math>\varnothing = 6.5</math> mm, PVC external sheath</b></p> <p><b>Wires section:</b></p> <ul style="list-style-type: none"> <li>- for power supply: 0.5 mm<sup>2</sup></li> <li>- for signals: 0.14 mm<sup>2</sup></li> </ul> <p><b>Cable 5 cores <math>\varnothing = 5.4</math> mm, PVC external sheath</b></p> <p><b>Wires section:</b></p> <ul style="list-style-type: none"> <li>- for power supply: 0.22 mm<sup>2</sup></li> <li>- for signals: 0.14 mm<sup>2</sup></li> </ul> <p>NOTES: Do not exceed the minimum cable bending radius of 30 mm.</p>	<b>PP / OC</b>		<b>LD</b>	
	<b>SIGNAL</b>	<b>WIRE COLOUR</b>	<b>SIGNAL</b>	<b>WIRE COLOUR</b>
	A	Green	A	Green
	B	White	B	White
	Z	Brown	Z	Brown
			A	Orange
			B	Light Blue
			Z	Yellow
	V+	Red	V+	Red
	GND	Blue	GND	Blue
≡	Shield	≡	Shield	

### SHIELDED CABLE

	<b>LINE DRIVER CONNECTION</b>	
	<b>POWER SUPPLY</b>	<b>RL</b>
	5 V	120 $\Omega$
	12 V	330 $\Omega$
	24 V	1000 $\Omega$
<p>In case of cable extension, the electrical connection between the body of connectors must be ensured.</p>		

### DIMENSIONS AND RECOMMENDED FIXING

<ul style="list-style-type: none"> <li>Use an elastic coupling for shaft junction.</li> </ul>		

### WHAT TO AVOID

<ul style="list-style-type: none"> <li>Any type of mechanical working (cut, drill, mill, etc.)</li> <li>Any modification either on the body or on the shaft of the encoder</li> <li>Any kind of bad usage</li> <li>External hits or stresses</li> </ul>	
---	--