


Code ST13	Project A33	Release B	Title TECHNICAL DATASHEET
---------------------	-----------------------	---------------------	-------------------------------------

OPTICAL ENCODER EN536

GENERAL FEATURES

- Optical rotary encoder.
- Bi-directional signals with zero pulse.
- Flange and body made of aluminium.
- Output by connector or cable (with sealing fairlead), radial or axial.

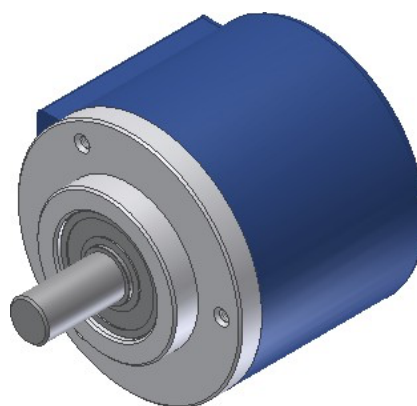

MECHANICAL AND ELECTRICAL FEATURES

<p>MECHANICAL</p> <ul style="list-style-type: none"> • Flange and body made of aluminium. • Shaft made of stainless steel. • Ball bearings with special high-sealed screens. • High protection even in harsh environmental conditions. <p>ELECTRICAL</p> <ul style="list-style-type: none"> • Protection against short-circuits. • Protection against inversion of polarity. • High stability of output signals. • Reading device with an infra-red light emitter and receiving photodiodes. • A and B output signals with phase displacement of 90° electrical. 	Code EN536	PP	LD	OC	
	Pulses per revolution	5 to 64000 ppr			
	Max. rotating speed	momentary	12000 rpm		
		permanent	8000 rpm		
	Max. load on shaft	100 N (radial) – 100 N (axial)			
	Shaft (diameter A x length L) mm	ø6x10 -ø8x20 -ø9.52x20 -ø10x20 others on request			
	Protection class	IP65 (standard) * IP67 (optional)			
	Operating temperature	0 + 70°C			
	Storage temperature	-20 + 80°C			
	Humidity	20 + 90% (not condensed)			
	Power supply	5 V ± 5% 5 + 28 V ± 5%			
	Max. consumption at 5V (with no load)	25 mA			
	Max. output current (each channel)	30 mA			
	Max. frequency	300 kHz			
	Output	Push-Pull	Line Driver	Open Collector	
	Standard length of cable	1 m			
Electrical connections	see rel. table				
Electrical protection	inversion of power supply polarity and short-circuits on output port				
Weight (according to model)	280 + 340 g				

* It is important to note that shaft rotates more freely in the version with protection class IP65.

ORDERING CODE

MODEL	CABLE/CONN. OUTPUT	ACCURACY	PPR	POWER SUPPLY	SHAFT Ø	CABLE / CONN.	OUTPUT	CONNECTION	OPTIONS
EN536	HR	S	xxxxx	05V	D06	CE	PP	2	V2

HR = radial HA = axial	No code = standard S = special	05V = 5V 0528 = 5+28V	D06 = ø6 mm D08 = ø8 mm 9.52 = ø9.52 mm D10 = ø10 mm	M.5 = 0.5m M01 = 1m CE = 7P Amph. CF = 10P Amph. CG = 12P Connei	LD = LINE DRIVER PP = PUSH-PULL ON = OC NPN OP = OC PNP	C = cable n = no. wiring	No code = . standard configuration V2 = protection class IP67
---------------------------	-----------------------------------	--------------------------	---	--	--	-----------------------------	--

Example 🖱️ **OPTICAL ENCODER EN536 HRS 01000 05V D06CE PP2 V2**

Code ST13	Project A33	Release B	Title TECHNICAL DATASHEET
---------------------	-----------------------	---------------------	-------------------------------------

CABLE AND ELECTRICAL CONNECTIONS

<p>Cable 8 cores $\varnothing = 6.5$ mm, PVC external sheath</p> <p>Wires section:</p> <ul style="list-style-type: none"> - for power supply: 0.5 mm² - for signals: 0.14 mm² <p>Cable 5 cores $\varnothing = 5.4$ mm, PVC external sheath</p> <p>Wires section:</p> <ul style="list-style-type: none"> - for power supply: 0.22 mm² - for signals: 0.14 mm² <p>NOTES: Do not exceed the minimum cable bending radius of 30 mm.</p>	PP / OC		LD	
	SIGNAL	WIRE COLOUR	SIGNAL	WIRE COLOUR
	A	Green	A	Green
	B	White	B	White
	Z	Brown	Z	Brown
			A	Orange
			B	Light Blue
			Z	Yellow
	V+	Red	V+	Red
	GND	Blue	GND	Blue
≡	Shield	≡	Shield	

SHIELDED CABLE

	LINE DRIVER CONNECTION	
	POWER SUPPLY	RL
	5 V	120 Ω
	12 V	330 Ω
	24 V	1000 Ω
In case of cable extension, the electrical connection between the body of connectors must be ensured.		

DIMENSIONS AND RECOMMENDED FIXING

<ul style="list-style-type: none"> Use an elastic coupling for shaft junction. 		

WHAT TO AVOID

<ul style="list-style-type: none"> All mechanical reworks (cutting, drilling, face milling etc.). Any modification either on the body or on the shaft of the encoder Any kind of bad usage External hits or stresses 	
--	--