


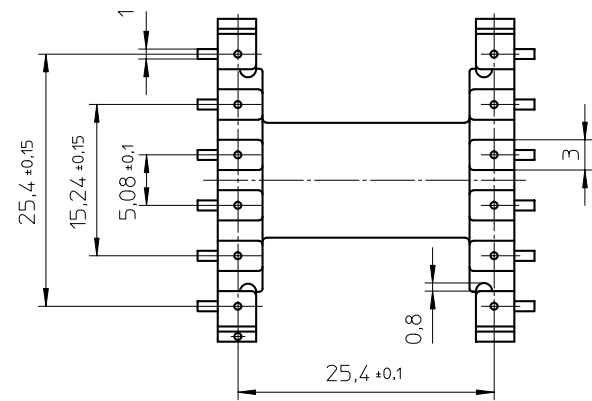


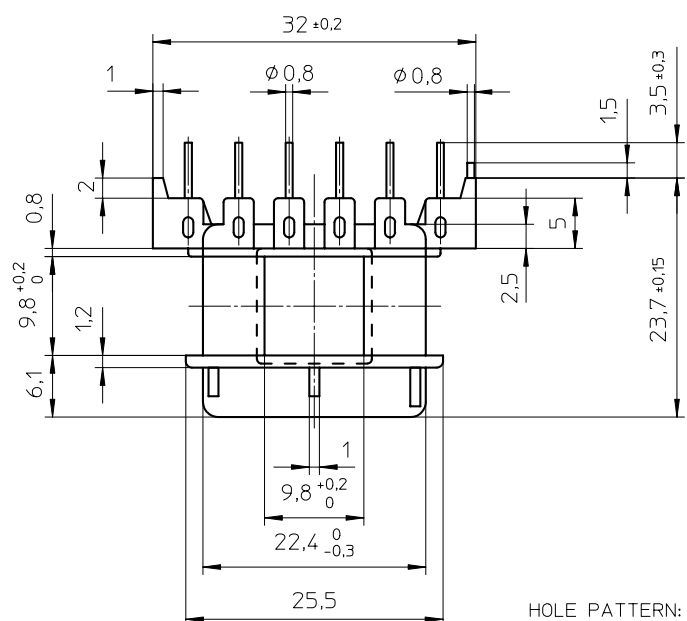

1 2 3 4 5 6 7 8

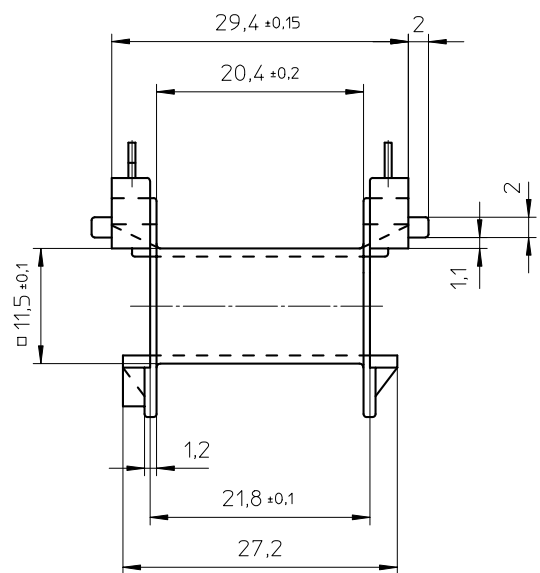

HOLE PATTERN:

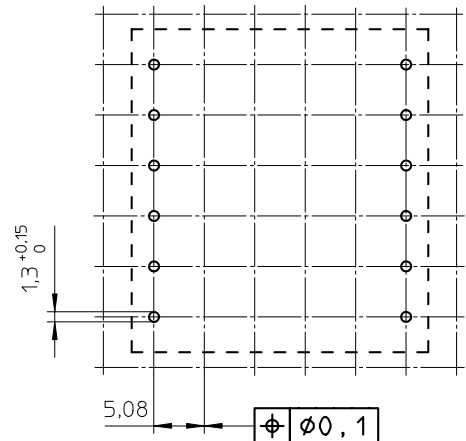

Coil former material : Ultramide A3X2G5 (PA6.6), glass-reinforced.
 UL File number: E41871 - UL94V-0.
 Pin material : CuSn6 , SnPb plated.
 Max. operating temp. : 130°C class B
 Resistance to soldering heat : 350°C - 2sec.
 Solderability : IEC 68-2-20 Part 2, Test Ta, method 1.
 Winding area : 96,9 mm²
 Mean length of turn : 60 mm.

CLASSNO.		CPH-E32/16/9-1S-12P		4312 021 26222		91-09-13	
						91-10-09	
						95-05-18	
						99-10-06	
						02-07-05	
NAME NAAM MPA	M.Veekens	SUPERS. VERV.	001	SH BL	112 - 001	010	A3
CHECK CONTR.		DAT.	91-06-21	Property of Eigendom van	© FERROXCUBE 2000		

1 2 3 4