



Hole pattern:

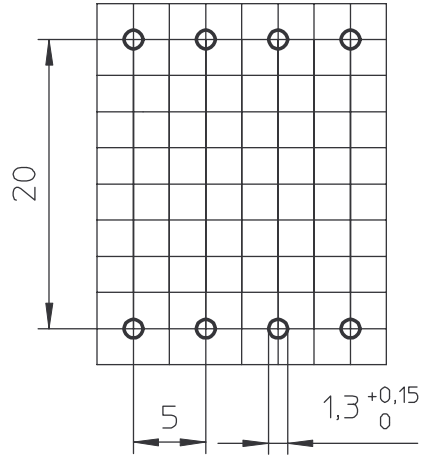

Coil former material: PM T375J (PF), glass-reinforced.
 UL file number: E59481 - UL94V-0.
 Pin material: Copper-clad steel, SnPb plated.
 Max. operating temp.: acc. to IEC 85 class H, 180°C.
 Resistance to soldering heat: acc. to IEC 68-2-20 Part 2, Test Tb, method 1B, 350°C-3.5sec.
 Solderability: acc. to IEC 68-2-20 Part 2, Test Ta, method 1, 235°C - 2sec.
 Min. winding area: 53.6 mm²
 Mean length of turn: 52.2 mm.

CLASS.NO.			02-03-28
			02-06-04
	CSH-E25/13/7-1S-8P-C	4322 021 04091	
NAME NAAM	T jon	1 SH BL	112 - 001 010
MPA	CHECK CONTR.	SUPERS. VERV.	DAT. 02-03-28
		Property of Eigendom van	© FERROXCUBE 2000
			A4