

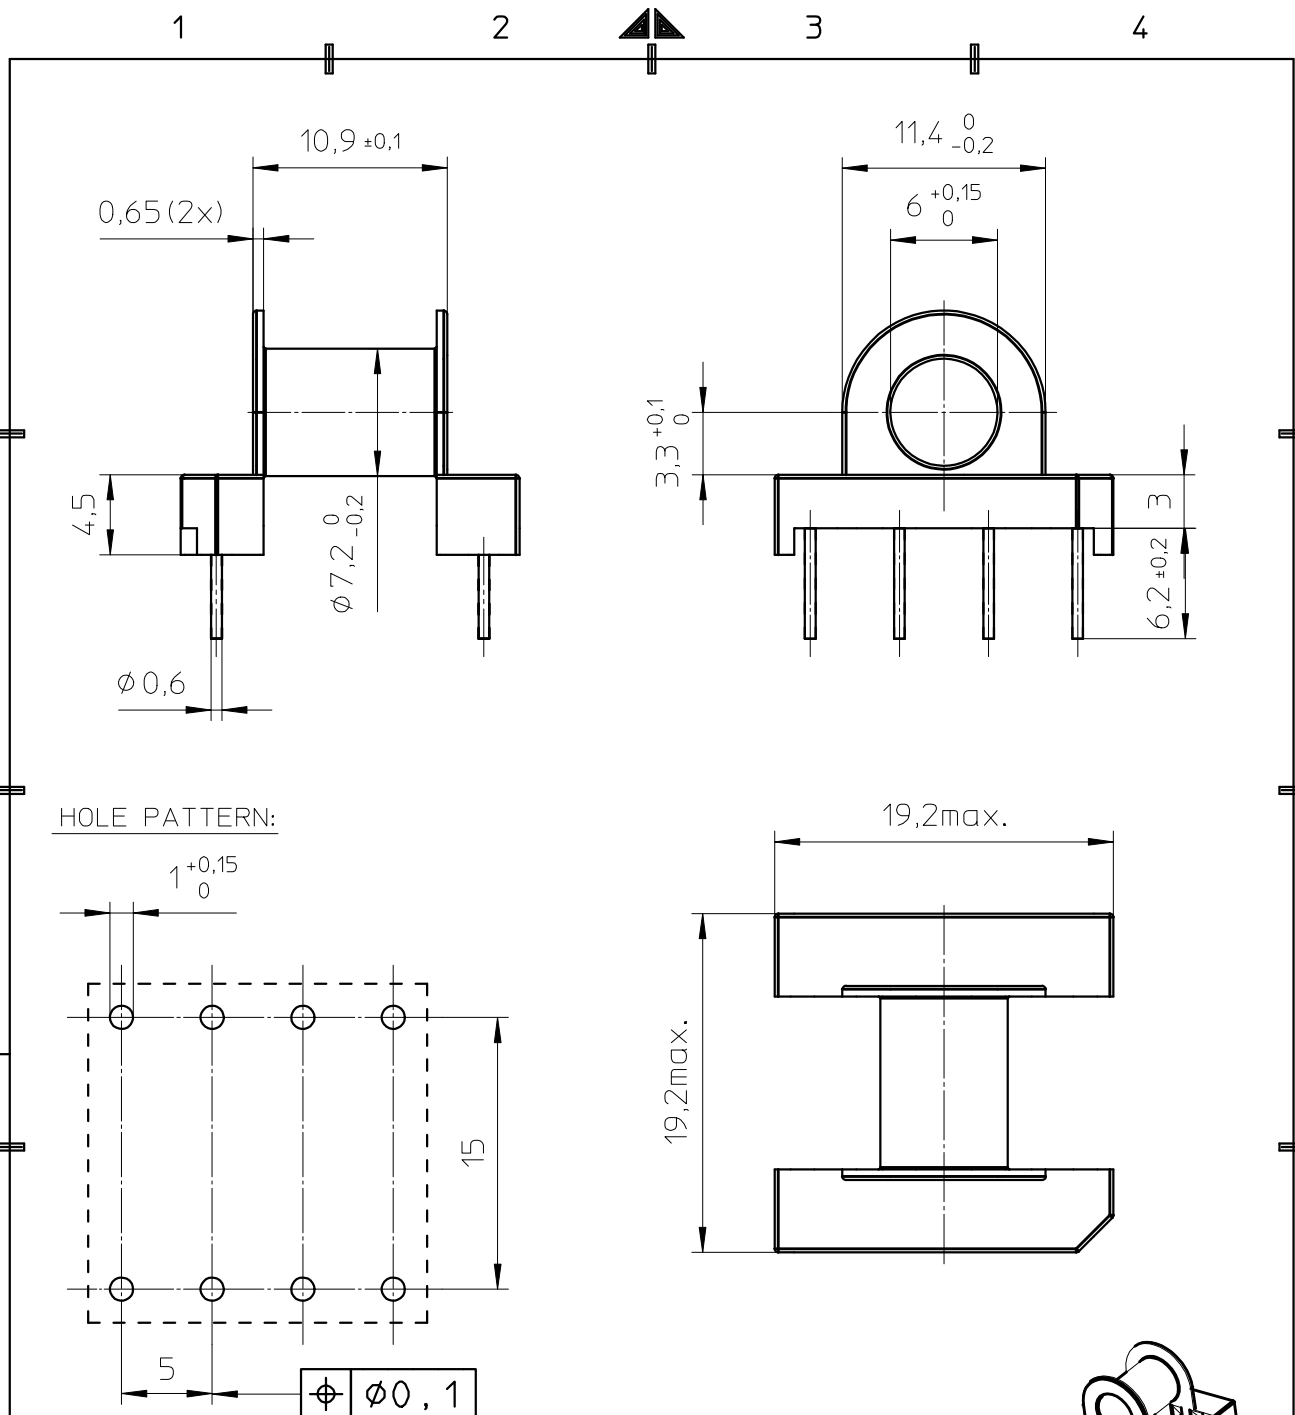



FERROXCUBE



Coil former material: Sumikon PM-9630 (PF), glass-reinforced.
 UL file number: E41429(M) - UL94V-0.
 Pin material: Copper-clad steel, Sn plated.
 Max. operating temp.: acc. to IEC 60 085 class H, 180°C.
 Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1A, 260°C-5s
 Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C-2s
 Min. winding area: 18,6 mm².
 Mean length of turn: 28,9 mm.

CLASS.NO.	CSH-EP17-1S-8P		4322 021 00481	1996-06-07
97-01-29				1997-01-29
				1998-01-28
				2005-03-11
NAME NAAM MPA	M.Veekens	SUPERS. VERV.	1 SH BL	112 - 001 010
CHECK CONTR.	DAT. 96-06-07	Property of Eigendom van	© FERROXCUBE 2000	
				A4