


Core **PQ50/35**

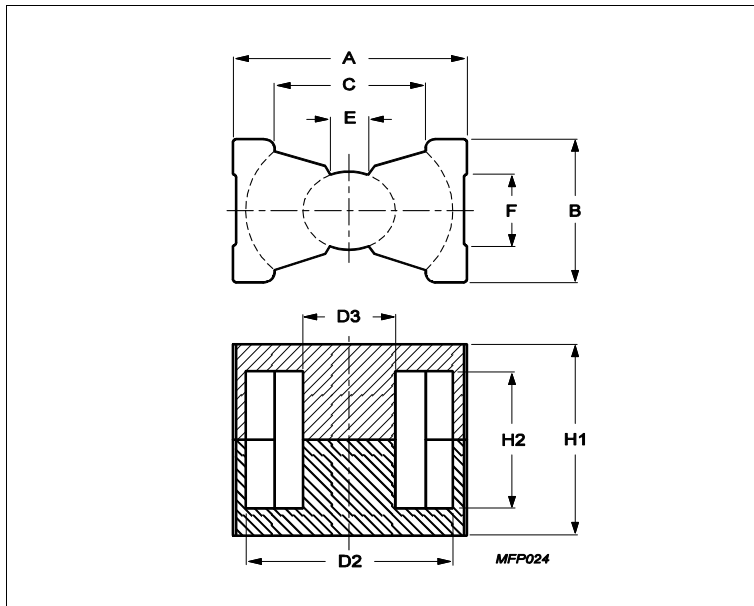

Effective parameters			
	Parameter	Value	Unit
$\Sigma(I/A)$	core factor (C1)	0.257	mm ⁻¹
Ve	effective volume	27800	mm ³
Le	effective length	84.4	mm
Ae	effective area	329	mm ²
Amin	minimum area	314	mm ²
m	PQ50/35	≈ 155.3	g/set

Dimensions for product: PQ50/35						
	Nom	Tol +	Tol -	Max	Min	Unit
A	51.00	0.70	0.70	51.70	50.30	mm
B	32.00	0.60	0.60	32.60	31.40	mm
C					32.00	mm
D2	44.00	0.70	0.70	44.70	43.30	mm
D3	20.00	0.35	0.35	20.35	19.65	mm
E					8.15	mm
F					18.00	mm
H1	35.00	0.50	0.50	35.50	34.50	mm
H2	21.10	0.60	0.60	21.70	20.50	mm

Inductance factor				
Material	Value	Tol +	Tol -	Unit
3C94	8600	25%	25%	nH/turns ²
3C95	12100	25%	25%	nH/turns ²
3C96	7700	25%	25%	nH/turns ²
3C97	11000	25%	25%	nH/turns ²
3F36	5400	25%	25%	nH/turns ²
3F4	3900	25%	25%	nH/turns ²

Power loss: 3C94				
Measuring conditions			Max	Unit
100 kHz	200 mT	100 °C	14.000	W/set
Power loss: 3C95				
Measuring conditions			Max	Unit

Core **PQ50/35**

Power loss: 3C95				
Measuring conditions			Max	Unit
100 kHz	200 mT	100 °C	13.000	W/set
100 kHz	200 mT	25 °C	14.000	W/set
Power loss: 3C96				
Measuring conditions			Max	Unit
100 kHz	200 mT	100 °C	13.000	W/set
400 kHz	50 mT	100 °C	7.200	W/set
Power loss: 3C97				
Measuring conditions			Max	Unit
100 kHz	200 mT	60 °C	14.000	W/set
100 kHz	200 mT	120 °C	13.000	W/set
100 kHz	200 mT	140 °C	17.000	W/set
Power loss: 3F36				
Measuring conditions			Max	Unit
500 kHz	50 mT	100 °C	5.900	W/set
500 kHz	100 mT	100 °C	39.000	W/set
Power loss: 3F4				
Measuring conditions			Max	Unit
1000 kHz	30 mT	100 °C	11.000	W/set
3000 kHz	10 mT	100 °C	17.000	W/set

Bsat					
Measuring conditions			Material	Min	Unit
25 kHz	250 A/m	100 °C	3C94	320	mT
25 kHz	250 A/m	100 °C	3C95	330	mT
25 kHz	250 A/m	100 °C	3C96	340	mT
25 kHz	250 A/m	100 °C	3C97	330	mT
25 kHz	250 A/m	100 °C	3F36	340	mT
25 kHz	250 A/m	100 °C	3F4	330	mT