

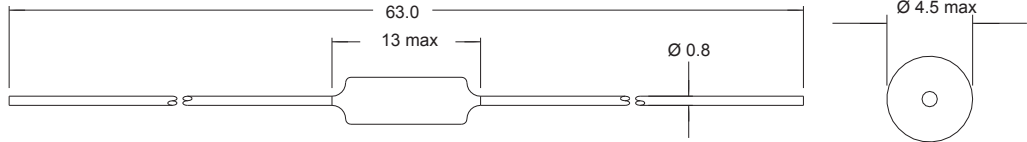


HCCC



All dimensions in mm

Leaded Inductors

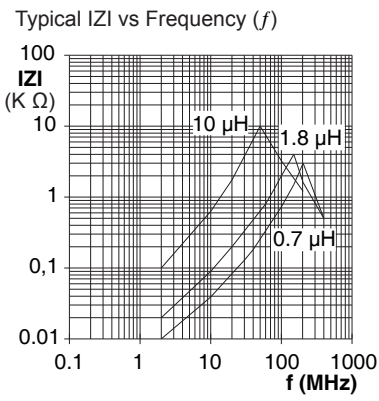

Part No	Inductance L (μH)	f _L (MHz)	Tol ± (%)	DCR max (Ω)	Rated DC Current (A)
HCCC-R70X-YY	0.70	1	20	0.018	7.00
HCCC-1R0X-YY	1.00	1	10,20	0.018	4.00
HCCC-1R2X-YY	1.20	1	10,20	0.035	2.60
HCCC-1R5X-YY	1.50	1	10,20	0.050	2.50
HCCC-1R8X-YY	1.80	1	10,20	0.066	2.50
HCCC-2R2X-YY	2.20	1	10,20	0.070	2.30
HCCC-2R7X-YY	2.70	1	10,20	0.080	2.30
HCCC-3R3X-YY	3.30	1	10,20	0.115	1.80
HCCC-3R6X-YY	3.60	1	10,20	0.132	1.80
HCCC-3R9X-YY	3.90	1	10,20	0.132	1.70
HCCC-5R6X-YY	5.60	1	10,20	0.140	1.50
HCCC-6R8X-YY	6.80	1	10,20	0.276	1.50
HCCC-8R2X-YY	8.20	1	10,20	0.276	1.50
HCCC-100X-YY	10.00	1	10,20	0.320	1.30
HCCC-120X-YY	12.00	1	10,20	0.650	0.70
HCCC-150X-YY	15.00	1	10,20	1.100	0.60
HCCC-180X-YY	18.00	1	10,20	1.200	0.60
HCCC-220X-YY	22.00	1	10,20	2.500	0.40
HCCC-270X-YY	27.00	1	10,20	2.900	0.30
HCCC-330X-YY	33.00	1	10,20	3.300	0.30

Material : Ferrite

Revised : 24 Jun 10

SPQ :

Packing Form	Loose / Box	Reel	Taped / Ammpack
Axial	1000 [-00]	2500 [-01]	1000 [-02]